



1. FITTING THE SVS3 BAR

1. Shorten the SVS3 bar (A). *)
2. Assemble the components one after the other as shown.
3. Then fit the bar lock (G).

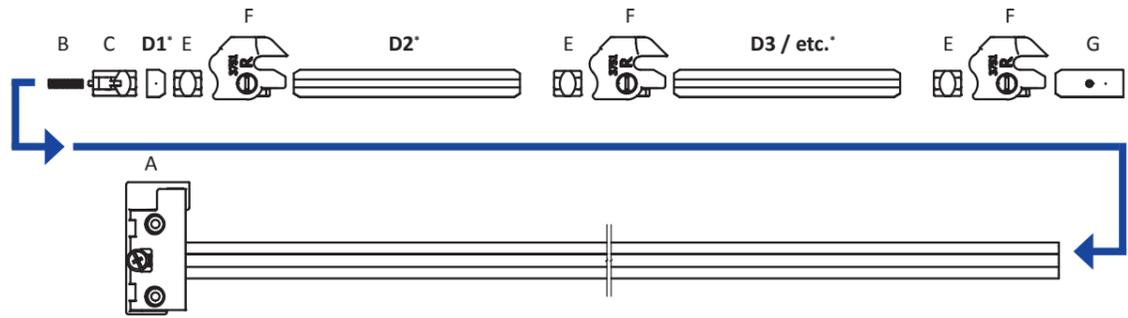


*) Measured values, see second page.

2. FIXING THE COMPONENTS

1. Turn a locking bracket (F) by hand.
2. Push all fitted parts upwards until spring (B) is fully compressed, and hold it in this position.
3. Tighten the bar lock (G) with the Allen key (H).



3. FUNCTION CHECK

1. Turn a locking bracket (F) by hand.
2. It must not be possible to turn any of the other locking brackets (F).
3. The locking bracket must turn easily. Otherwise move the bar lock (G) down a little.

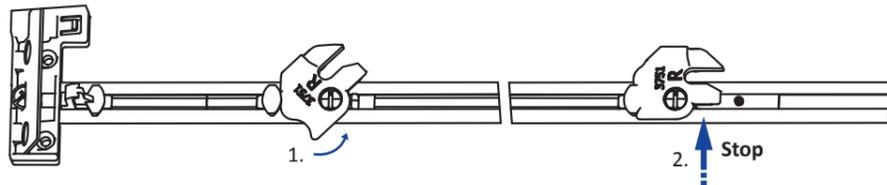

4. INSTALLING THE SVS3 BAR

1. Fasten the installed SVS3 bar at the screw-on position (A1).
2. Install the guides, drawers and panels. This fixes the bar in place!



5. INSTALLING THE SECURITY PEG

Clip the appropriate BBP security peg into the drawer.

6. FUNCTION CHECK

After you have installed all of the drawers, perform a check:

1. Pull out the top drawer with the security peg. All other drawers are locked (exception: pen tray).
2. Pull out the second drawer. All of the other drawers are locked.
3. Continue in this way until you have checked all drawers.


LEHMANN Vertriebsgesellschaft mbH & Co. KG
Postfach 26 20 • D-32383 Minden
Fon +49 571/50 599-0 • Fax +49 571/50 599-822
info@lehmann-locks.com • www.lehmann-locks.com
DIN EN ISO 9001:2008 certified

BDA SVS3 DIY 05-2019 (GB) D63584 v2


SVS3 DRAWER LOCK / ANTI-TILT

Do-it-yourself installation kit for SVS3 drawer lock for BBP system / Orga Aer

- Prevents simultaneous opening of drawers.
- Uncontrolled opening of several drawers is prevented.
- Risk of unit tilting or falling over is minimized. Injury or damage to property can be prevented.
- Suitable for use in units without pen tray. Lock several drawers with one lock. The SVS3 interlock can be used with or without a central lock.
- For BBP system (Orga Aer) for 32 mm hole lines.
- Up to 5 drawers and for cabinets up to 1000mm in height.

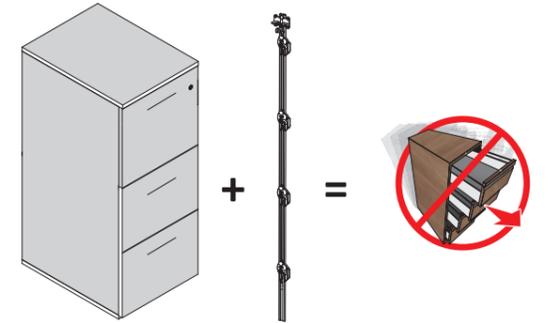


TO DO

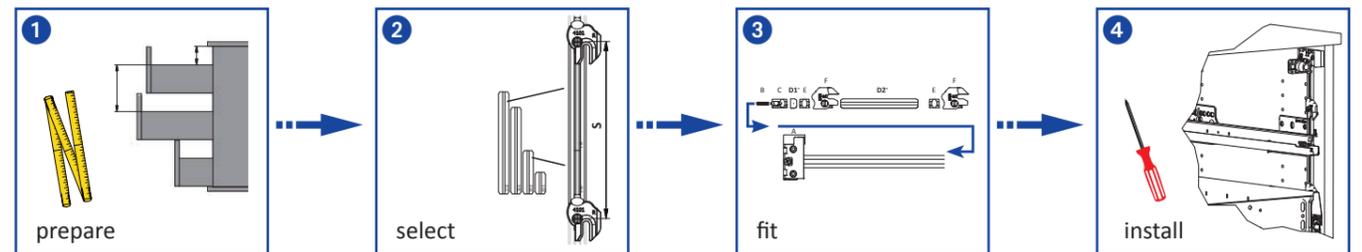

PARTS LIST

(A) SVS3 bar	1 piece
(B) Spring	1 piece
(C) Counter bar	1 piece
(D) Short inserts	6 pieces
Inserts for 32mm size units	17 pieces
(E) Counter bracket	5 pieces
(F) Locking bracket right	5 pieces
(G) Bar lock, for screw locking	1 piece
(H) Allen key	1 piece

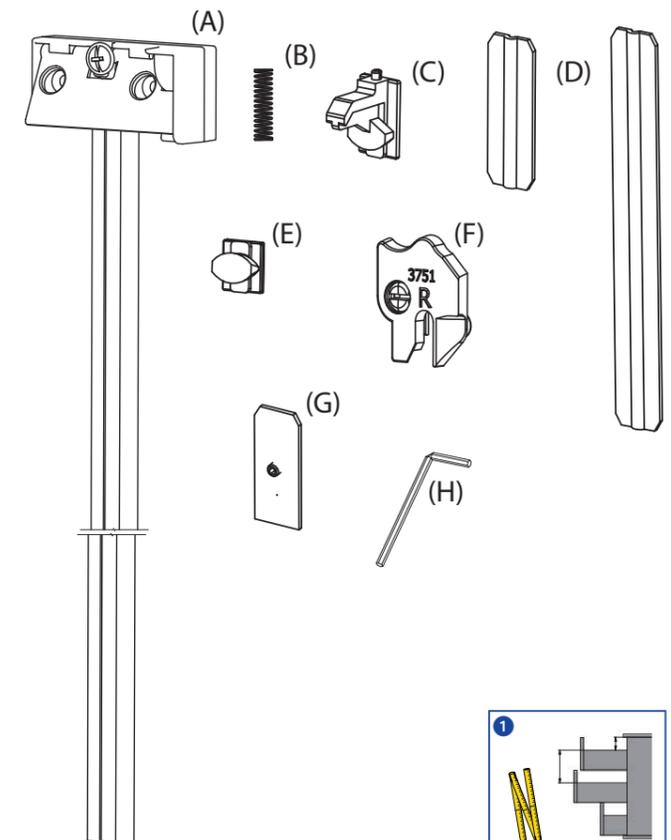

Lock (available separately).





VCS18.2
Lock 430





Prestige
Lock 430

∅ VCS18.2 18mm - 19mm
∅ Prestige 16,5mm - 19mm




PREPARE

- The right-hand side of the body does not have to be grooved. The dimension 37mm results from the integrate mounting bracket in the guide.

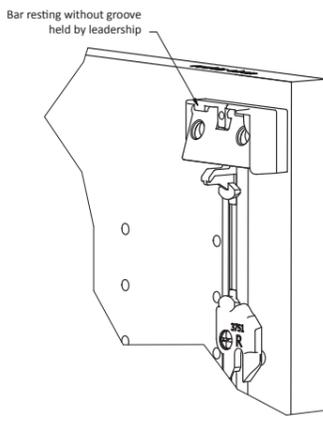

- Determine dimension (M) minimum 103mm. The distance between the top edge of the first draw side and the underside of the top panel.
The dimension (M) is the basis for the configuration of the SVS3 bar.
- Determine the lock position **A2** (at least 21mm). This results in **A1** (at least 7mm), the screw-on position of the SVS3 bar to the underside of the cover.
If the dimension (A2) changes, the dimension (A1) changes accordingly. For installation without a lock, use (A1) for further calculations.
- A variable distance between the lock and the frame is created with the (D1) inserts.
Determine (D1).
Several inserts can be combined and thus any dimension (M) can be covered from the minimum of 99mm.
- Enter the distances between the frames S2 - S5 (at least 128mm). This allows you to determine the inserts to be used (D2 - D5).
- Calculate (S1), the distance between the screw-on position of the SVS3 bar and the centre of the security peg.
- Calculate the bar length (L) and shorten the SVS3 bar (A).

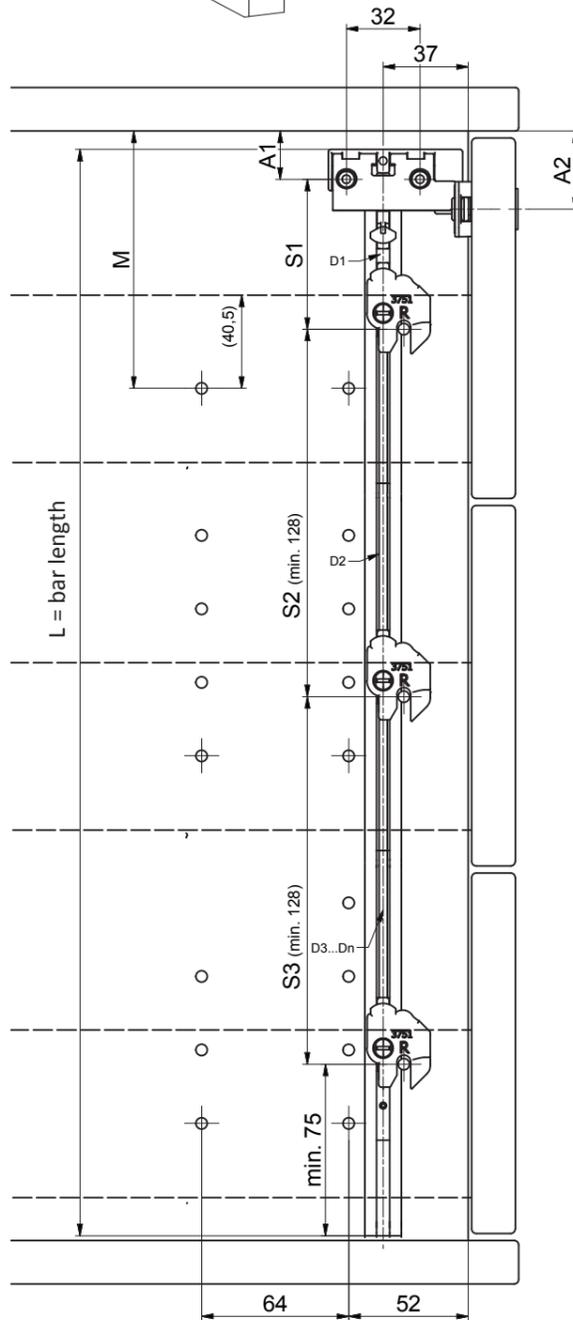

M (min. 102mm)

M = _____

A2 (min. 25mm)

A2 = _____

A1 (min. 13mm)
A1 = A2 - 12mm

A1 = _____

D1 = M - A1 - 85mm
or
D1 = M - A2 - 73mm

D1 = _____

S2 = _____	-32mm =	D2 = _____
S3 = _____	-32mm =	D3 = _____
S4 = _____	-32mm =	D4 = _____
S5 = _____	-32mm =	D5 = _____

S1 = 59mm + D1

S1 = _____


L = S1 + S2 + ...Sn + min. 88mm

L = _____


- To fit the calculated inserts, continue on the next page. ➡

ALLOCATION OF INSERTS


Drawer spaces greater than 128mm are extended/assembled with 32mm size units.
No inserts need to be shortened.




D1 Example

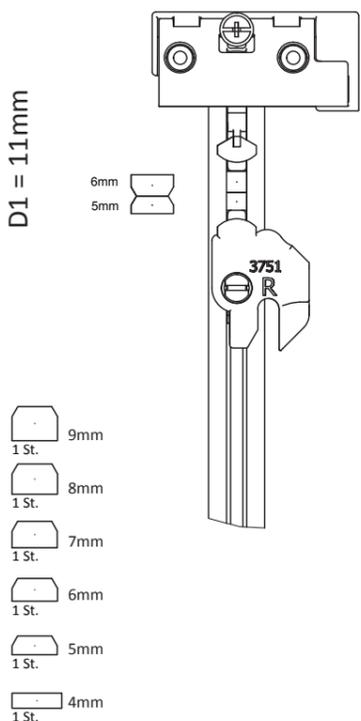

Short inserts

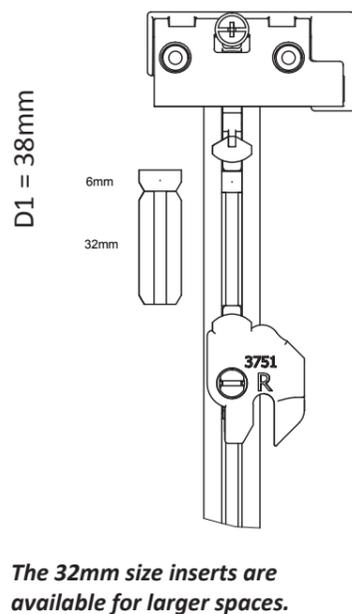

D2-6 Example 32er size units

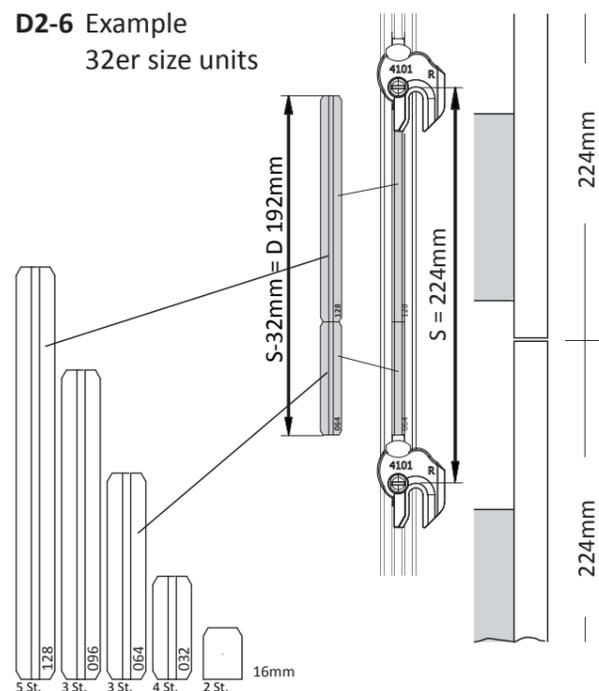

32 size unit inserts

