

WOOD AND GLASS SHELVING SYSTEMS



## **SYMBOLS AND FINISHES LEGEND**

### **SYMBOLS**



= SHELF SAFELY LOCKED DURING TRANSPORTATION AND AT HOME.



= ANTI-TURNOVER LOCKING SYSTEM



= NORMS / PATENTS



= PHILLIPS / POZIDRIV



= WITH BUFFER



= PART NO.



= BLADE SLOT

= COMBI SLOT



= WITH MAGNET



= PCS. PER PACKAGE



= HEXAGONAL SOCKET



= NEWTON



= CAPACITY LOADING



= HEXALOBULAR SOCKET



= FRICTION



= WOOD / GLASS THICKNESS



= COUNTERSUNK HEAD



= AUTOMATIC



= HOLE DIAMETER



= PAN HEAD



= DROP DOWN



= DIAMETER



= FLANGE HEAD

= FLAT HEAD





= STANDARD HINGE



= HEIGHT

= LENGTH



= TRILOBULAR SCREW



= KIMANA HINGE



= RIGHT VERSION



= SELF-TAPPING SCREW



= FLAP HINGE



= LEFT VERSION



= EURO THREAD



= WITH SPRING



= SETTING CODE



= METRIC THREAD



 $= {\sf WITHOUT} \; {\sf SPRING} \;$ 



= PCS. PER PAD



= PRE-INSERTED SCREW



= REVERSED SPRING



= CUT ON REQUEST



= PRE-INSERTED SCREW AND SPREADING BUSH




= WITH FLANGE



= SELF ADHESIVE

NOTE: Printing errors and omissions may exist despite our best efforts to ensure accurancy. We reserve the right to alter specifications without notice.

### **MATERIALS**





HSS = High Speed Steel

(BR) = Brass

ABS = Acrylonitrile
Butadiene
Styrene

ZAnk = Nickel-plated Zinc Alloy STzk = Zinc-plated Steel  $\left( AL \right) = Aluminium$ 

 $\left( \mathsf{WD} \right) = \mathsf{Wood}$ 

EVA) = Ethylene Vinyl Acetate



+ EP = other engineering plastic available on request

SR = SOFT RUBBER

+ SR = other soft rubber available on request

(EPn) = Natural Engineering Plastic

EPc = Clear Engineering Plastic

SRn = Natural Soft Rubber

(EPw) = White Engineering Plastic

EPg = Grey Engineering Plastic

SRw = White Soft Rubber

EPwg = Water Green Engineering Plastic

SRb = Black Soft Rubber



### **FINISHES**



= OTHER FINISHES AVAILABLE ON REQUEST

PART NO.	FINISHES	PART NO.	FINISHES	PART NO.	FINISHES
00	Insignificant finish	IF	Middle Grey	UT	T-Met 9007
AA	Natural	IJ	Light Grey	UZ	T-Met
AB	White	IL	Grey 20	WA	Bronzed
AE	White 9010	IN	Grey met. 26	WI	Burnished
EA	Black	JB	Bright Aluminium	XD	Satin-finished Steel
EC	Matt Black	JC	Aluminium - Chrome	YA	Nickel-plated
EE	Anthracite	JD	Matt Aluminium	YB	Bright Nickel-plated
EW	Grey 9007	JE	Satin-finished Aluminium	YC	Matt Nickel-plated
FU	Gunmetal	JF	Aluminium - Brass	YD	Satin-finished Nickel-plated
FV	Gunmetal V52	JG	Aluminium 5	YQ	Black Nickel
GR	Raw	JL	Aluminium PE 11	<b>Z</b> 9	Black Zinc
НА	Brass-Plated	JM	Aluminium RAL 9006	ZA	Zinc alloy
НН	Tropicalized	KA	Chrome	ZN	Zinc-plated
HL	Raw Brass	КВ	Bright Chrome	ZQ	Bright Gold
нх	Graphite	КС	Matt Chrome	ZY	Titanum
IA	Grey	NN	Metallic Beige	ZZ	Clear
IB	Metallic Grey	RO	Red		

# **KALABRONE MINI**



### **KALABRONE MINI**

KALABRONE MINI is a shelf support with a minimal squared shape for free-standing shelves. Boasting a captivating design, it perfectly meets the actual market demands. It is suitable for shelves from 5 to 10 mm thick. Its solid structure guarantees a capacity loading of 6 kg, including the weight of the glass shelf, for each support with a shelf 150 mm deep.

KALABRONE MINI comes with a vertical adjustment through the oval hole positioned on the upper bracket.

The soft element made of engineering plastic positioned on the upper and the lower bracket guarantees a perfect adhesion to the shelf, thus avoiding that the shelf is accidentally removed.









Glass shelves





Recommended fixing countersunk screw type - head  $\varnothing$  5 mm max.

#### SOLID AND PLASTERBOARD WALLS



- It is the responsibility of the customer:
- to ensure that the wall is of a suitable quality to hold the shelf fixing in place. - to use the proper hardware fittings according to the construction of the wall.

COMBINATION SHELF LOAD AND SHELF DEPTH

Shelf is clamped between a layer of white soft rubber on


both the lower and upper side (coloured parts).


10 max

For more specific information, please refer to the WARNINGS section at the end of the catalogue.


**BRACKET ALIGNMENT** 

### SHELF LOCKING










+ shelf weight = 6 kg MAX for each shelf support



Note: KALABRONE MINI is supplied individually bagged with fitting guide.

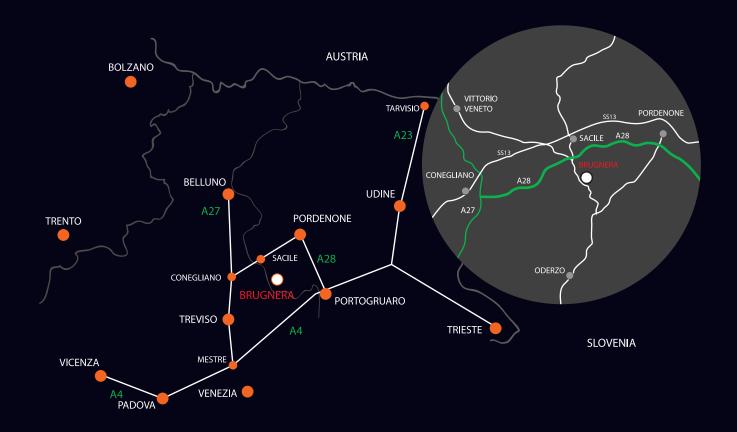



www.italianaferramenta.com