









CUTTABLE IN-LINE SLIDING DOOR SYSTEM

Accessories	Qty	Accessories	Qty
Upper rail 	1	Down rail 	1
Upper runner middle regulator 	2	Upper runner side regulator 	2
Down runner middle regulator 	2	Down runner side regulator 	2
15-8 Spanner 	1	TH00020 Spacer($\phi 20 \times 2$) 	4
Side Spring 	2	8-8 ratchet spanner 	1
Positioning plate 	1	4mm extended hex wrench 	1

Product specification

Cabinet inner width	Cuttable rail range	Remark
2050mm	1650mm~2050mm	Cut freely within the range
2450mm	2050mm~2450mm	Cut freely within the range
2850mm	2450mm~2850mm	Cut freely within the range
1650mm	1350mm~1650mm	Cut freely within the range


2. Installation (Door thickness Handle included $\leq 45\text{mm}$)

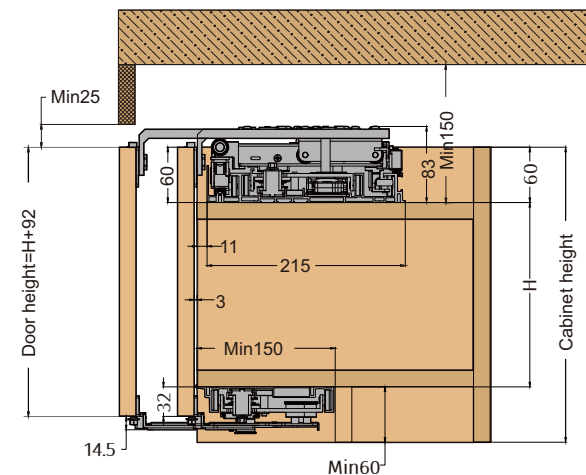


3. Door size

3.1 Door panel cover side panel

Two door

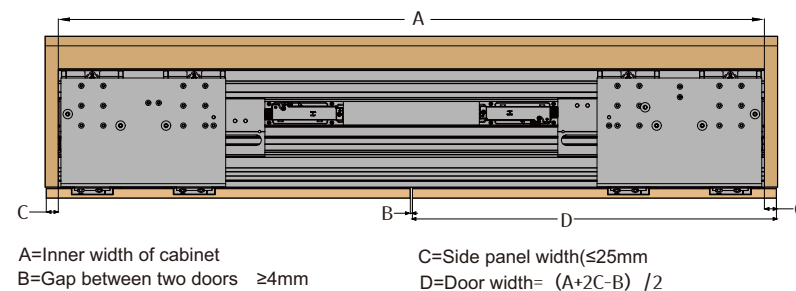


Four door

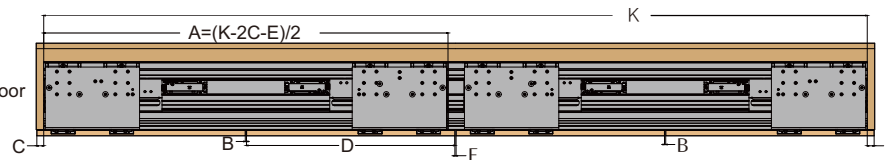

A = Single product standard length
 C = Side panel width ($\leq 25\text{mm}$)
 B = Gap between two doors ($\geq 4\text{mm}$)
 D = Door width = $(K + 2C - 2B - E) / 4$
 E = Gap between middle two doors (two doors not open at same time, $E \geq 3\text{mm}$, two doors open at same time, $E \geq 6\text{mm}$)
 K = Four door Inner width of cabinet
 ***According to A value to choose the product length, remark Single rail lengths K/2


3.2 Door panel not cover side panel

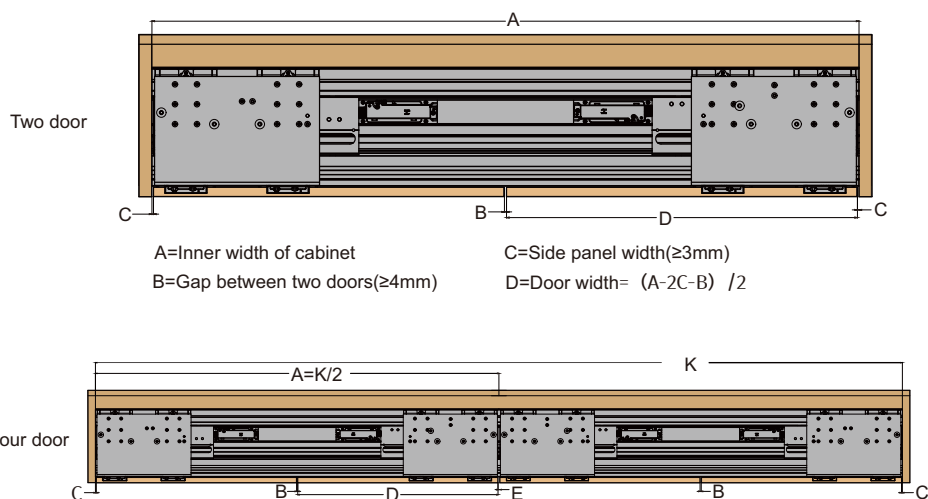

A=Inner width of cabinet
B=Gap between two doors($\geq 4\text{mm}$)
C=Side panel width($\geq 3\text{mm}$)
D=Door width= $(A-2C-B) / 2$


A=Single product standard length
B=Gap between two doors $\geq 4\text{mm}$
C=Side panel width($\geq 3\text{mm}$)
D=Door width= $(K-2C-2B-E) / 4$
E=Gap between middle two doors(two doors not open at same time, $E \geq 3\text{mm}$, two doors open at same time, $E \geq 6\text{mm}$)
K=Four door Inner width of cabinet
***According to A value to choose the product length, remark Single rail lengths K/2

4. Cabinet requirements


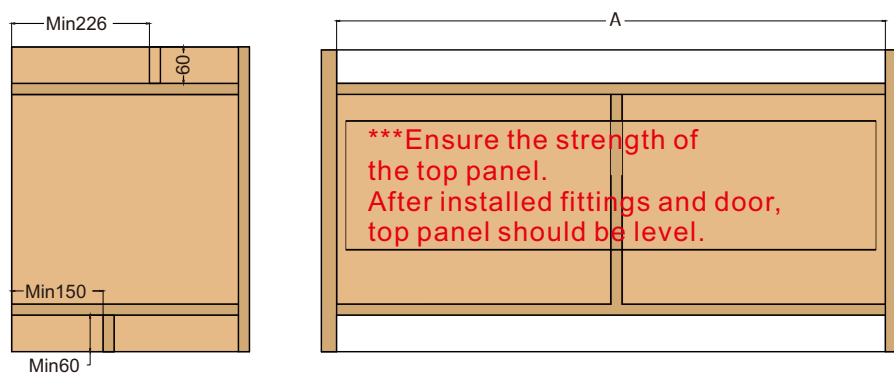




5. Installation

Product Specification	2050	2450	2850	1650
L	270	370	470	195

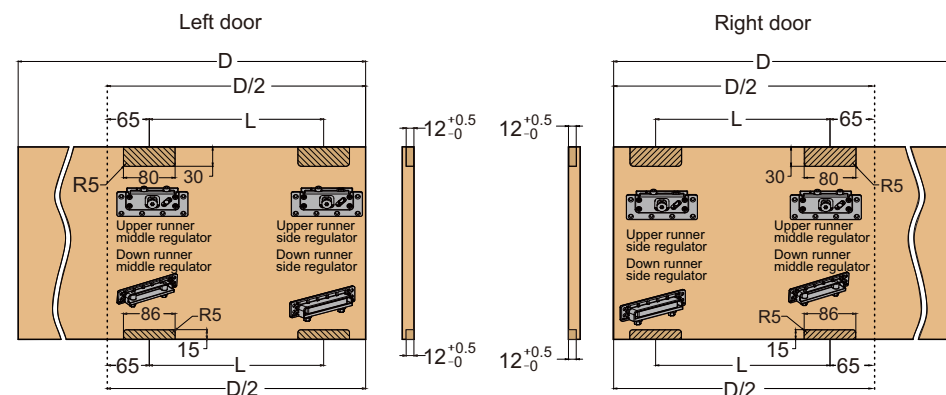


6. Cuttable rail(Any side of rail can be cut)

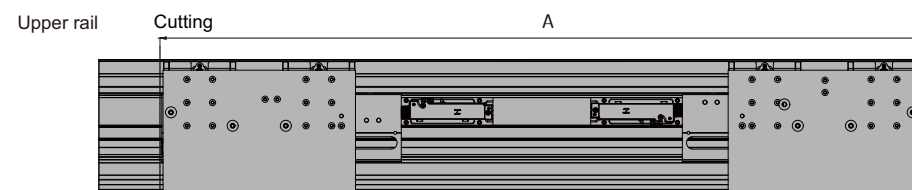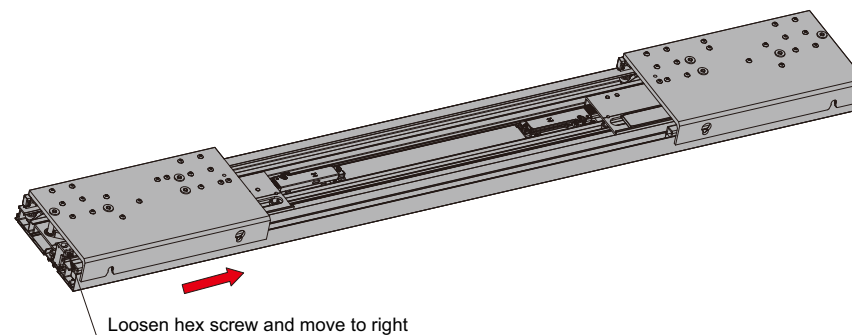

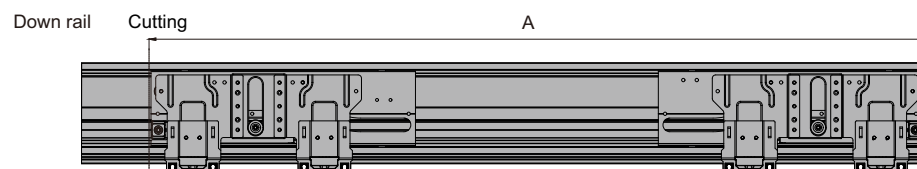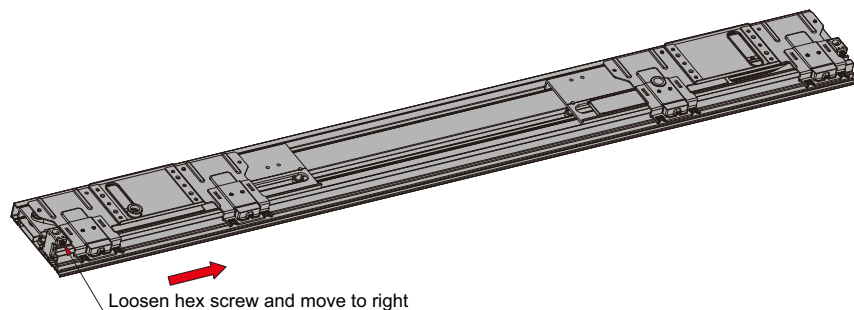


7. Install Upper rail and down rail

Installation method 1




Installation method 2




8. Install door(Same installation method of left and right doors)


8.1 Pull right upper roller and hang screw into hole



8.2 Fix the screws by wrench (Do not tighten)




9. Adjust door level (same installation methods of left and right doors)

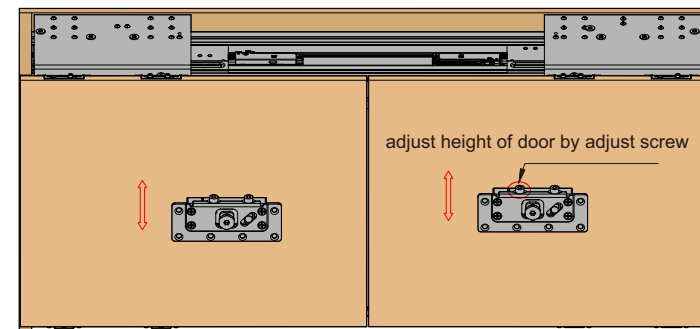


10. Adjust gap(same installation methods of left and right doors)

10.1 Loosen hex screw to move door to proper position and lock screw

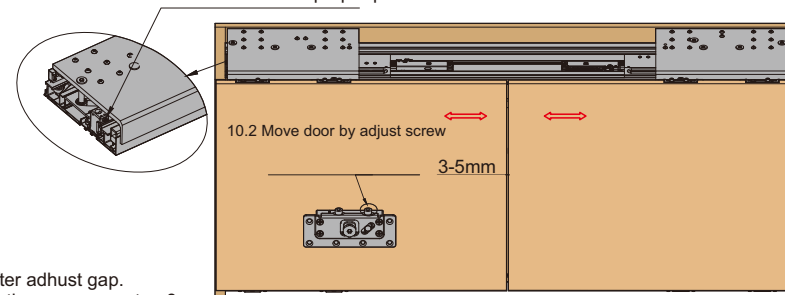



After adhust gap.
Fixthe screws as step 8.

11. Install down runner

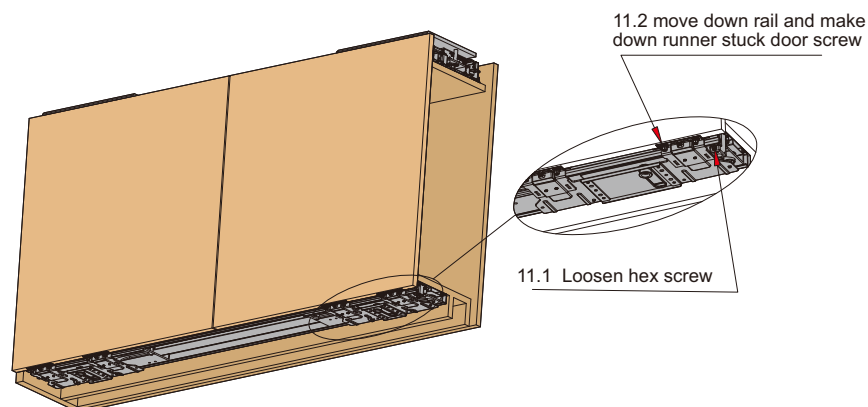


12. Adjust gap of side panel to make two doors level

12.1 Adjust screw

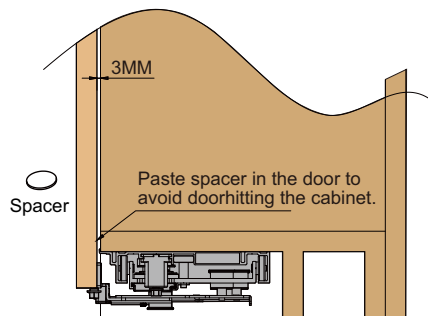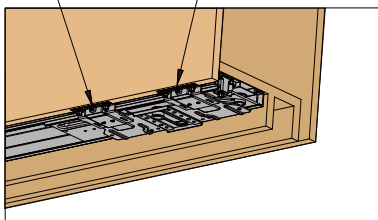


12.2 Pull door and Lock down runner

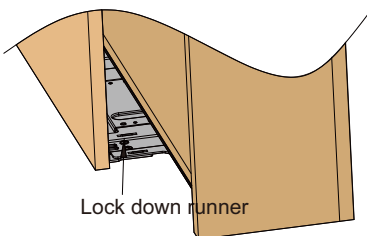


13. Adjust damper position

13.1 Fix dramper

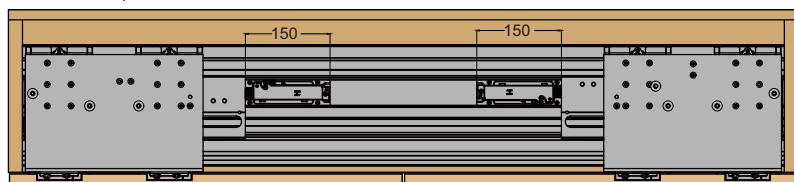

13.2 Open door to check that the doors is fully open

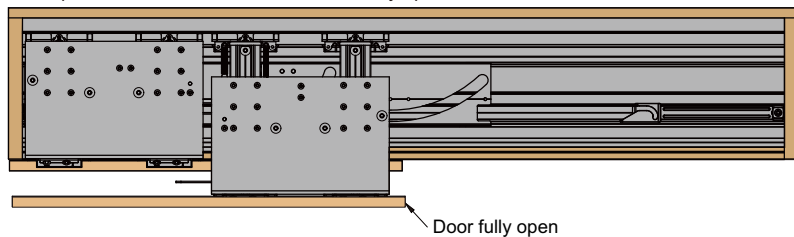

14. According to weight of door, increase or decrease the spring

