


TARGET




CONNECTINGS

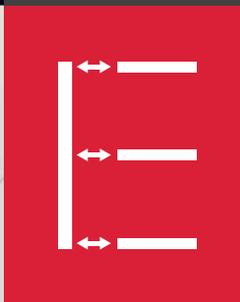

# SYMBOLS AND FINISHES LEGEND

## SYMBOLS



= SHELF SAFELY LOCKED DURING TRANSPORTATION AND AT HOME.



= ANTI-TURNOVER LOCKING SYSTEM



= NORMS / PATENTS



= PHILLIPS / POZIDRIV



= NEWTON



= PART.NO



= HEXAGONAL SOCKET



= FRICTION



= PCS. PER PACKAGE



= BLADE SLOT



= AUTOMATIC



= COMBI SLOT



= DROP DOWN



= CAPACITY LOADING



= COUNTERSUNK HEAD



= WOOD / GLASS THICKNESS



= PAN HEAD



= STANDARD HINGE



= HOLE DIAMETER



= FLANGE HEAD



= KIMANA HINGE



= DIAMETER



= FLAT HEAD



= FLAP HINGE



= LENGTH



= TRILOBULAR SCREW



= WITH SPRING



= HEIGHT



= SELF-TAPPING SCREW



= WITHOUT SPRING



= RIGHT VERSION



= EURO THREAD



= REVERSED SPRING



= LEFT VERSION



= METRIC THREAD



= SETTING CODE



= PRE-INSERTED SCREW



= FOR ROUND TUBE



= PCS. PER PAD



= PRE-INSERTED SCREW AND SPREADING BUSH



= FOR OVAL TUBE



= CUT ON REQUEST



= WITH BUFFER



= SELF ADHESIVE



= WITH MAGNET



= WITH FLANGE

NOTE: Printing errors and omissions may exist despite our best efforts to ensure accuracy. We reserve the right to alter specifications without notice.

## MATERIALS

<b>ZA</b> = Zinc Alloy	<b>ST</b> = Steel	<b>HSS</b> = High Speed Steel	<b>BR</b> = Brass	<b>ABS</b> = Acrylonitrile Butadiene Styrene
<b>ZAnk</b> = Nickel-plated Zinc Alloy	<b>STzk</b> = Zinc-plated Steel	<b>AL</b> = Aluminium	<b>WD</b> = Wood	<b>EVA</b> = Ethylene Vinyl Acetate

**EP** = **ENGINEERING PLASTIC**

+ **EP** = other engineering plastic available on request

**SR** = **SOFT RUBBER**

+ **SR** = other soft rubber available on request

<b>EPn</b> = Natural Engineering Plastic	<b>EPc</b> = Clear Engineering Plastic	<b>SRn</b> = Natural Soft Rubber
<b>EPw</b> = White Engineering Plastic	<b>EPg</b> = Grey Engineering Plastic	<b>SRw</b> = White Soft Rubber
<b>EPwg</b> = Water Green Engineering Plastic		<b>SRb</b> = Black Soft Rubber



## FINISHES



+ **OTHER FINISHES AVAILABLE ON REQUEST**

PART. NO	FINISHES	PART. NO	FINISHES	PART. NO	FINISHES
AA	Natural	JB	Bright Aluminium	QB	Walnut
AB	White	JC	Aluminium - Chrome	RO	Red
AC	Opal White	JD	Matt Aluminium	UZ	T -Met
AE	White 9010	JE	Satin-finished Aluminium	WA	Bronzed
AK	Champagne	JF	Aluminium - Brass	WI	Burnished
AL	Ivory	JG	Aluminium 5	XD	Satin-finished Steel
EA	Black	JL	Aluminium PE 11	YA	Nickel-plated
EB	Glossy Black	JM	Aluminium RAL 9006	YB	Bright Nickel-plated
EC	Matt Black	KA	Chrome	YC	Matt Nickel-plated
EE	Anthracite	KB	Bright Chrome	YD	Satin-finished Nickel-plated
FU	Gunmetal	KC	Matt Chrome	ZA	Zinc alloy
GR	Raw	MA	Brown	ZN	Zinc-plated
HA	Brass-Plated	MB	Light Brown 1	ZQ	Bright Gold
HH	Tropicalized	NN	Metallic Beige	ZY	Titanium
HL	Raw Brass	NO	Beige	ZZ	Clear
IA	Grey	OA	Oak	00	Insignificant finish
IB	Metallic Grey	OZ	Ash		
IF	Middle Grey	PA	Light Ash		
IJ	Light Grey	PZ	Beech		
IL	Grey 20	QA	Maple		



## TARGET J12

**TARGET** is the new structural connecting fitting conceived by Italiana Ferramenta with high fastening capacity, suitable for mounting with wood dowels.

**TARGET** is an ideal solution for the installation of cabinets in tight spaces.

**TARGET** provides the possibility of pre-assembling into the panels without obstructing the packaging.

### FEATURES AND BENEFITS

#### Easy pre-assembling

Simple pre-insertion into the panels. Conceived for automatic assembling.

#### Suitable for furniture in kit

Its unique features make **TARGET** the ideal solution for kit furniture.

#### No hardware kits

There is no need of hardware kits.

#### High-speed assembling

Mounting is extremely fast and efficient thanks to the pre-assembling of the panels.

#### Strong structural fastening

The panels are hard and securely fastened, therefore the cabinet is 100% stress-resistant.


#### Wide range of applications

Practical solution for a wide range of applications.

15 - 25 mm





### INSTALLATION

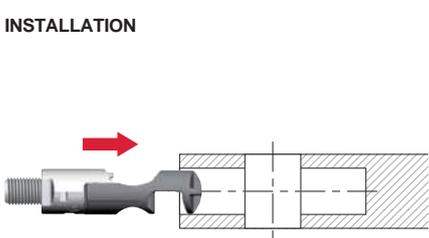


#### VERY IMPORTANT


Insert **TARGET** connecting with countersunk hole on top.

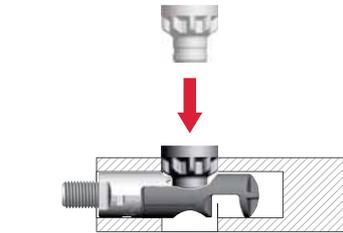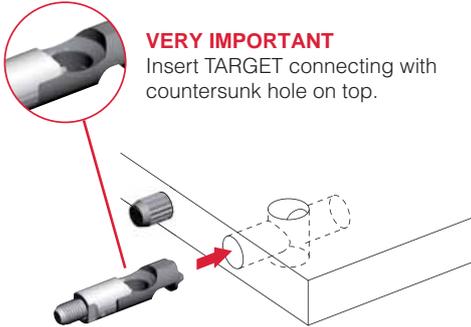



Place the pinion screw from above.

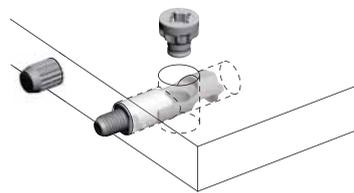

By turning the pinion screw, the threaded dowel makes a synchronized rotation.

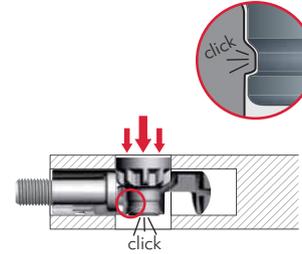

Press strongly with PZ2 cross screwdriver to slot the pinion screw in.

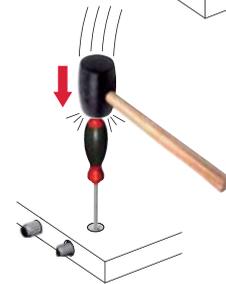
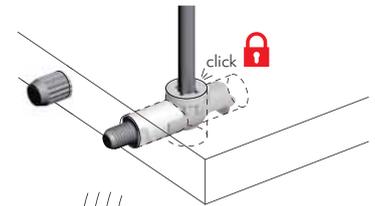


It may be helpful to use a tool in order to easily slot the pinion screw in.



### ASSEMBLING AND LEVELLER ADJUSTMENTS

#### VERY IMPORTANT



It is allowed to use a cordless driver drill ONLY with **friction mode** on.

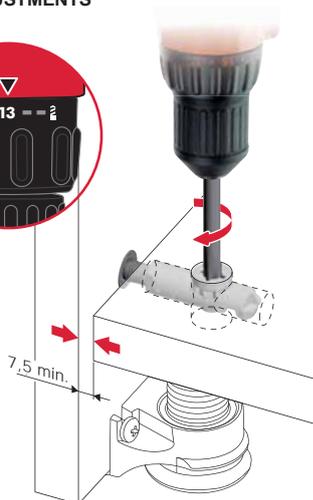



For details about adjustable levellers for **TARGET J12** refer to the related sections.

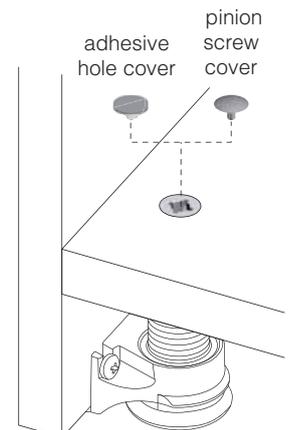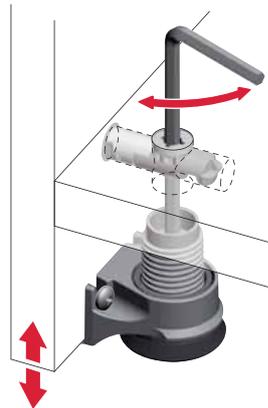



## TARGET J12

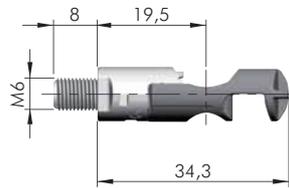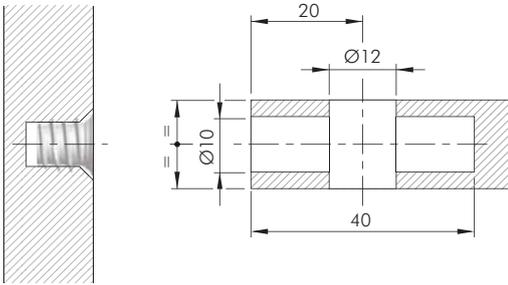

21807160ZN

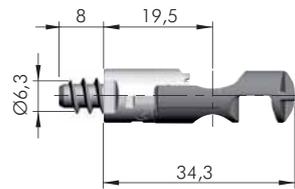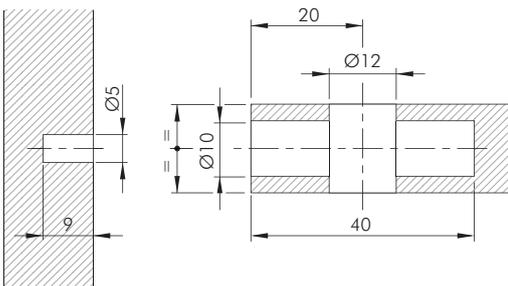



21808160ZN

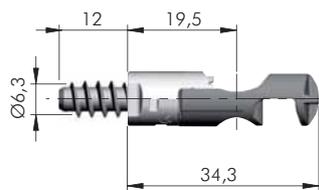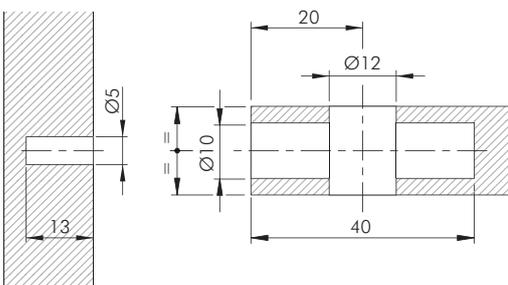



21808240ZN





## TARGET FIXING ACCESSORIES

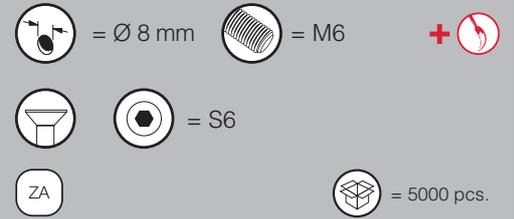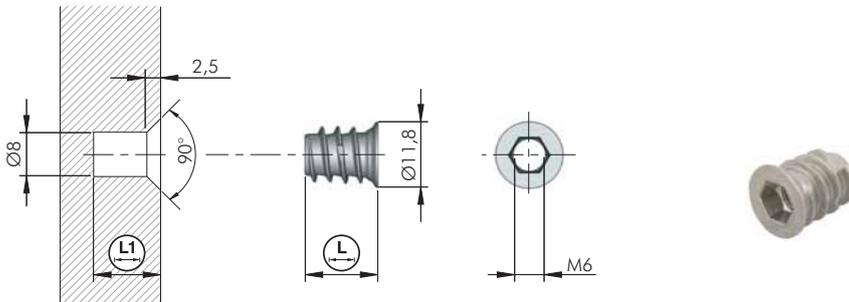

 123 		
20102010GR	10	12
20102020GR	13	15
20102040GR	17	19

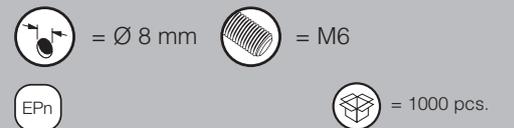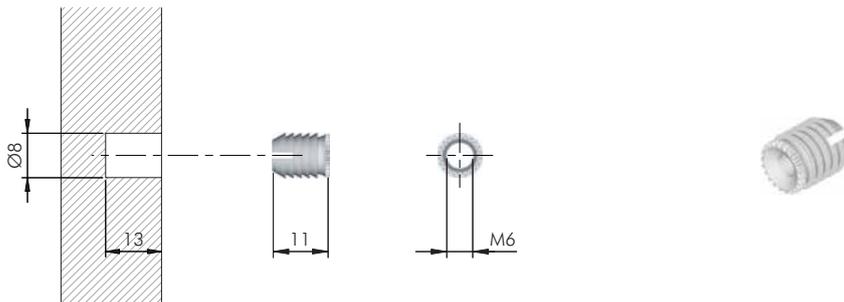


 123 
20303030AA

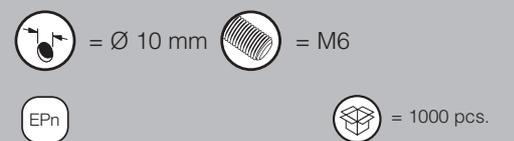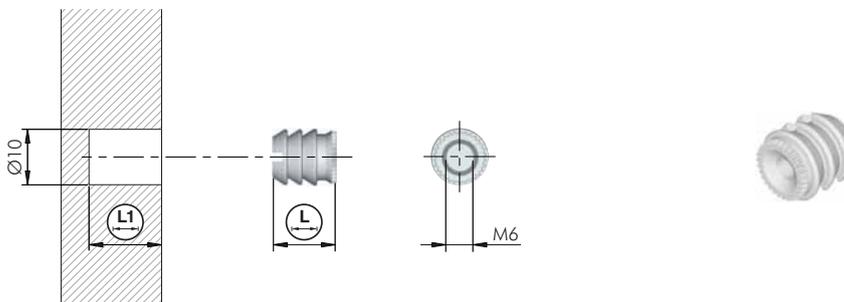





 123 		
20304030AA	11	13
20304040AA	13	15




**M6 thread**







**Euro thread**

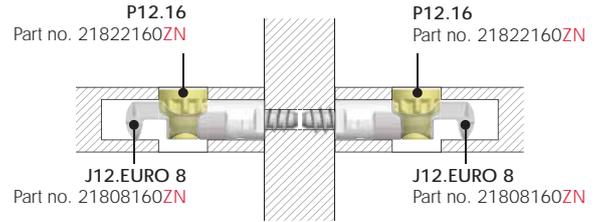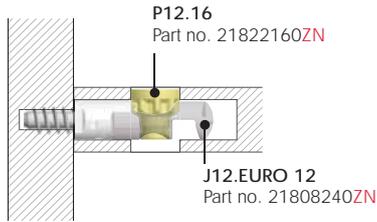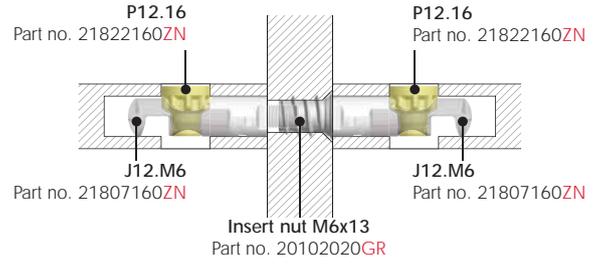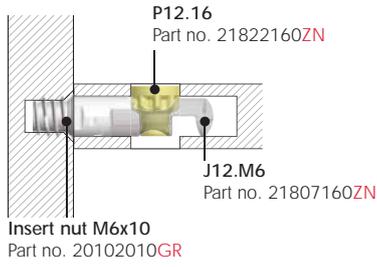


**M6 thread**







**Euro thread**

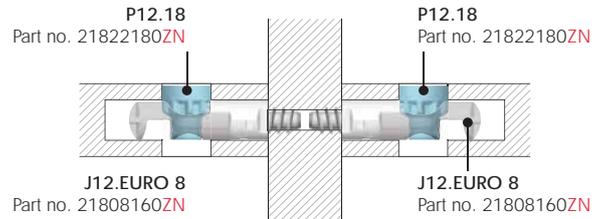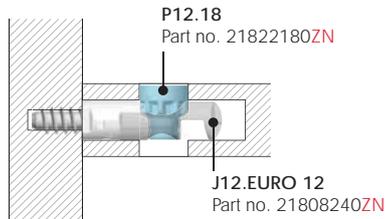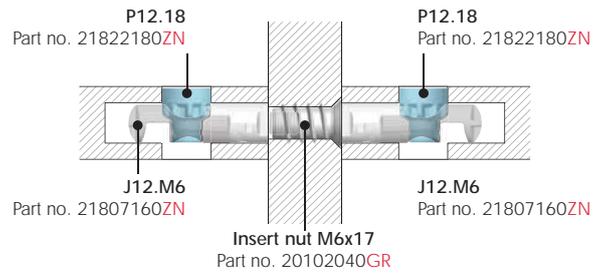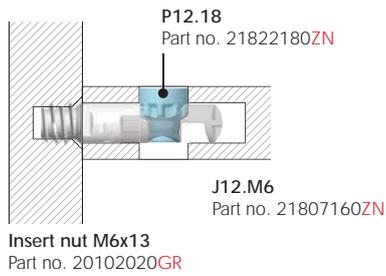

**M6 thread**



**Euro thread**

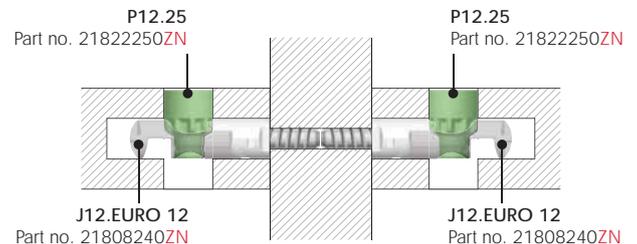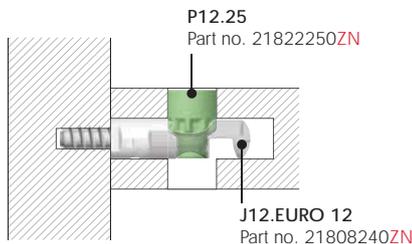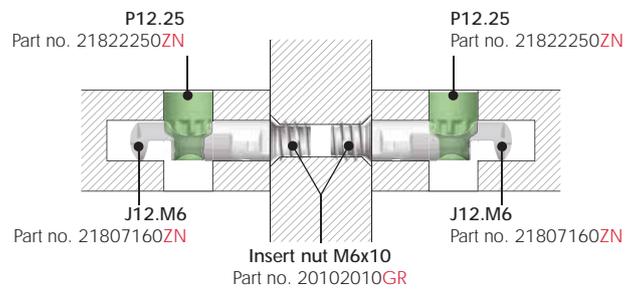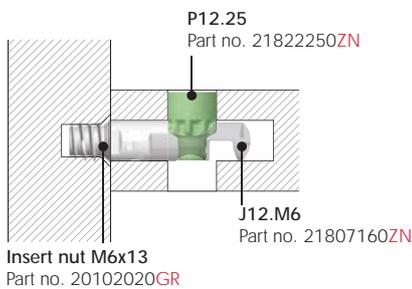


## LH7.20 ADJUSTABLE LEVELLER FOR TARGET J12




150 Kg per piece




### DRILLING PLAN DETAIL

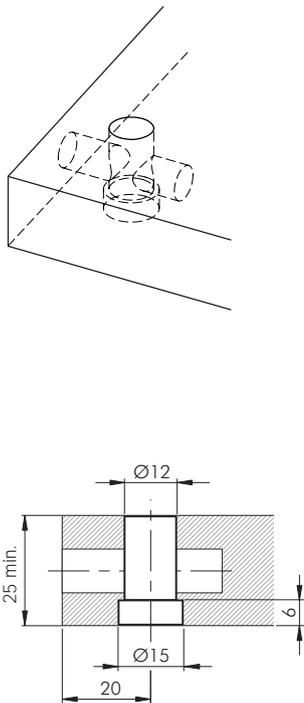


### INSTALLATION




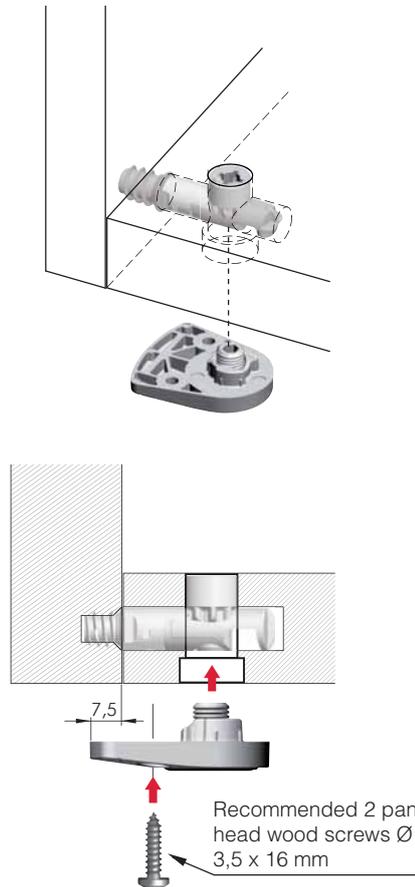


### ADJUSTMENT

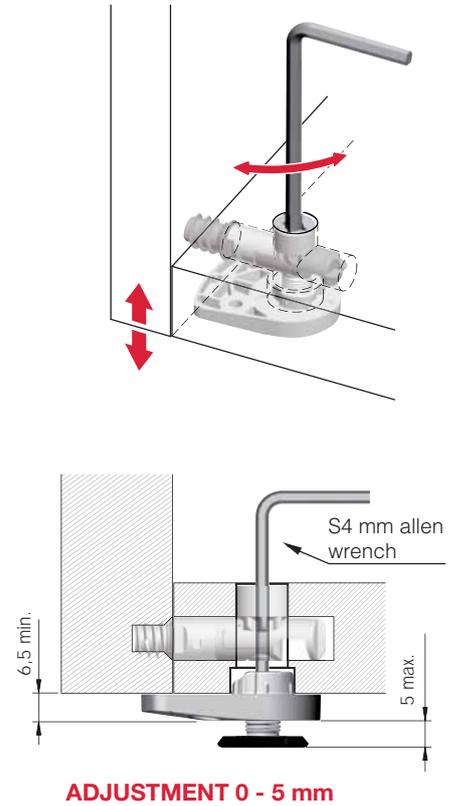


### COVER CAP INSERTING

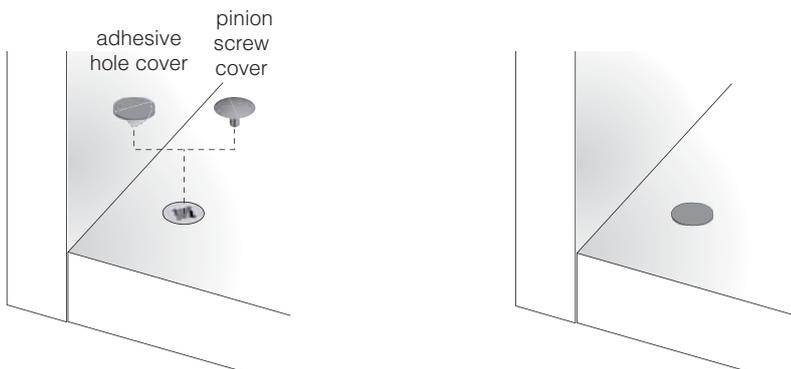

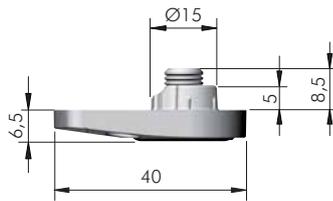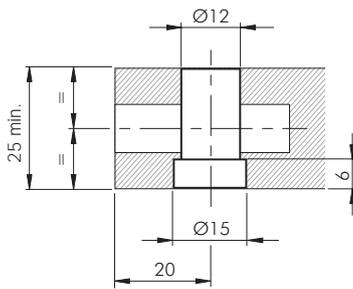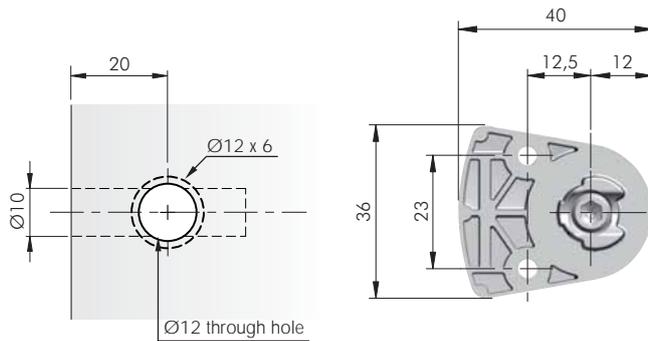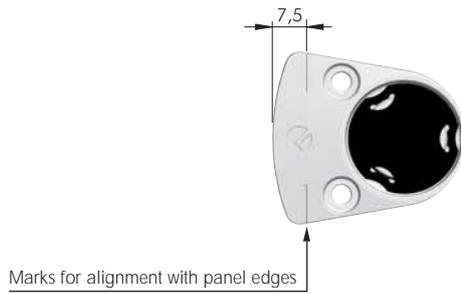



**ADJUSTMENT 0 - 5 mm**



2183620000



**LH7.20 LEVELLER ACCESSORY**

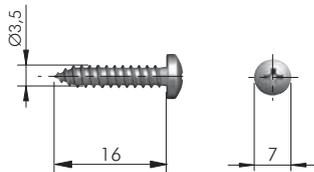

60103140ZN

**INTEGRATO ADJUSTABLE LEVELLERS FOR TARGET J12**






175 Kg per piece



**DRILLING PLAN DETAIL**




**INSTALLATION**

**ADJUSTMENT**

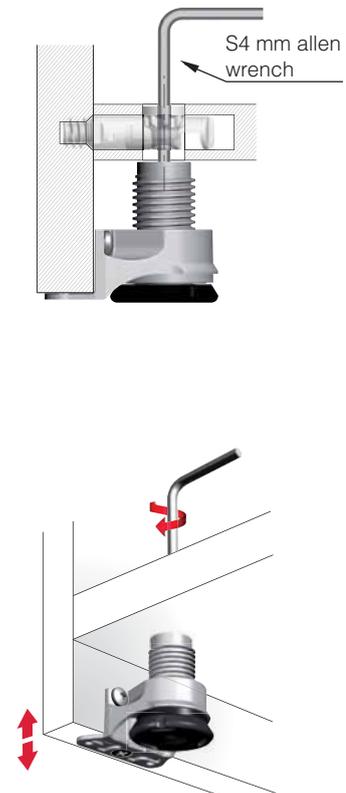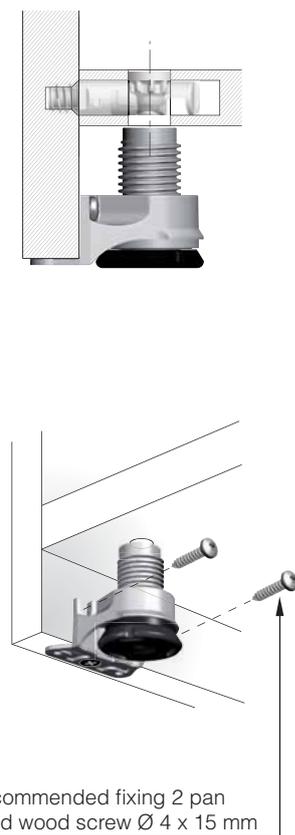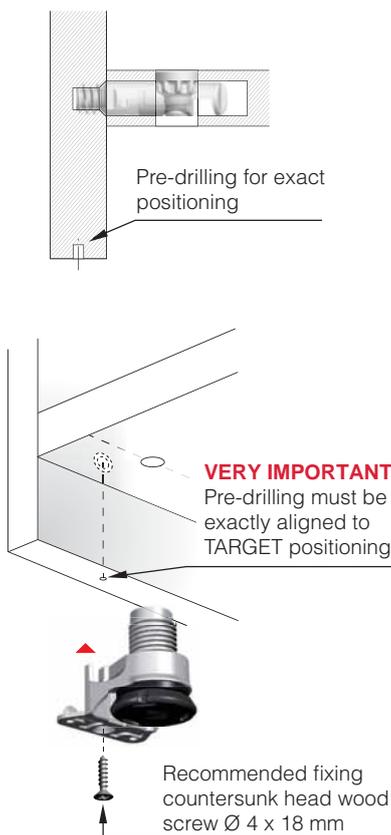


**INTEGRATO VERSIONS**

**COVER CAP INSERTING**

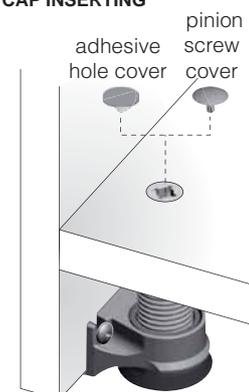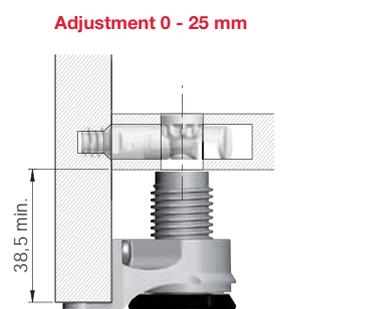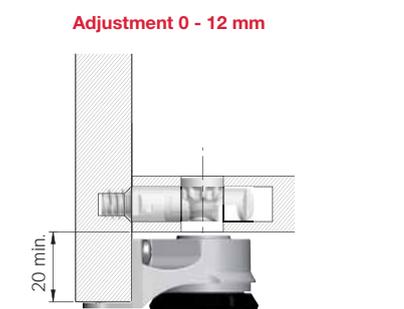



**INTEGRATO A FOR TARGET J12**

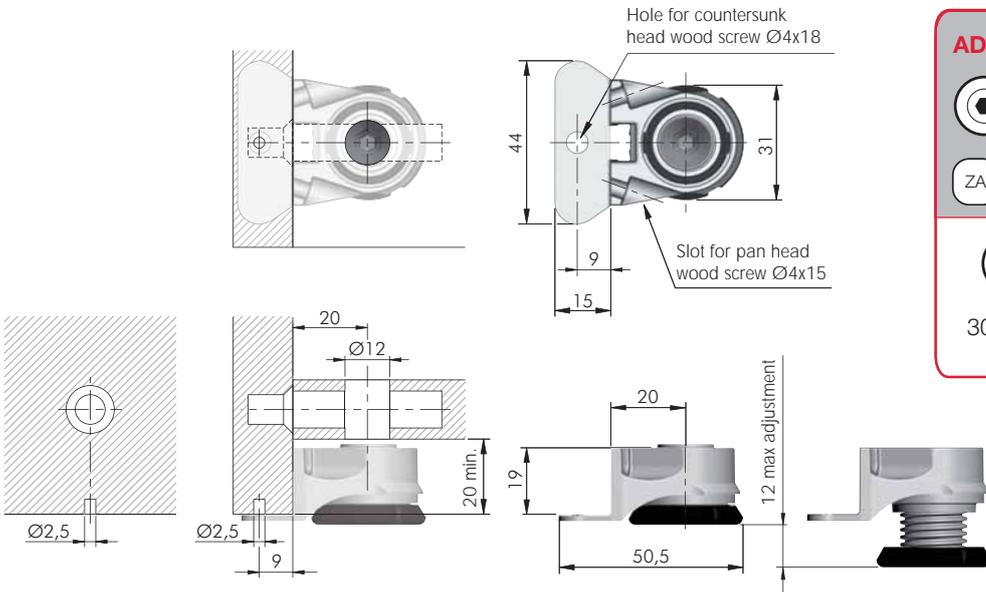


**ADJUSTMENT 0 - 12 mm**

= S4, S6 mm  
 = 300 pcs.

123

3010104000

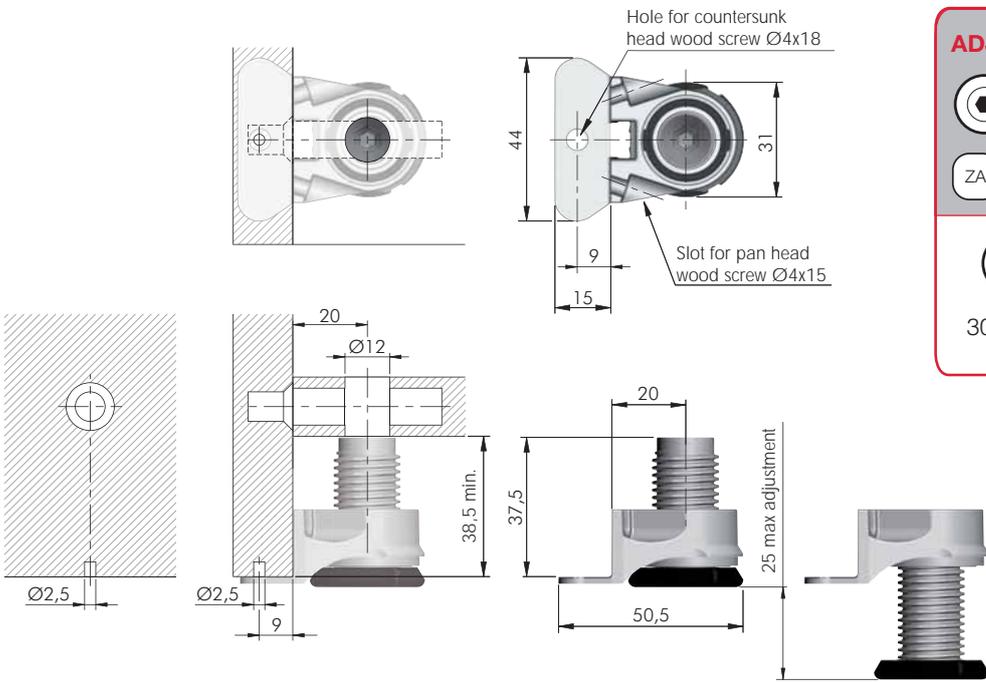

**ADJUSTMENT 0 - 25 mm**


= S4, S6 mm  
 = 250 pcs.

123

3010105000




## INTEGRATO G FOR TARGET J12

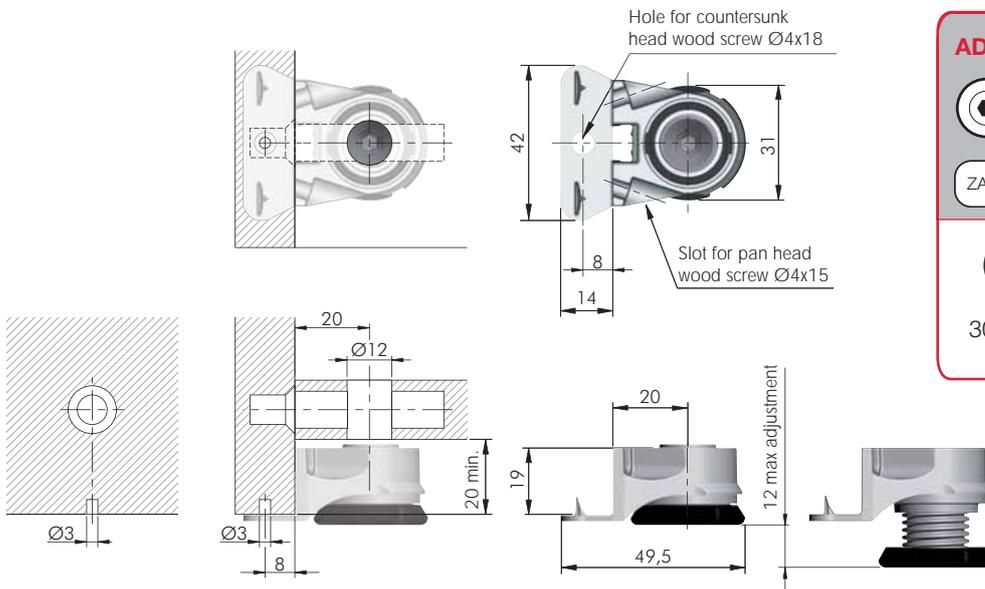

### ADJUSTMENT 0 - 12 mm



3010603000

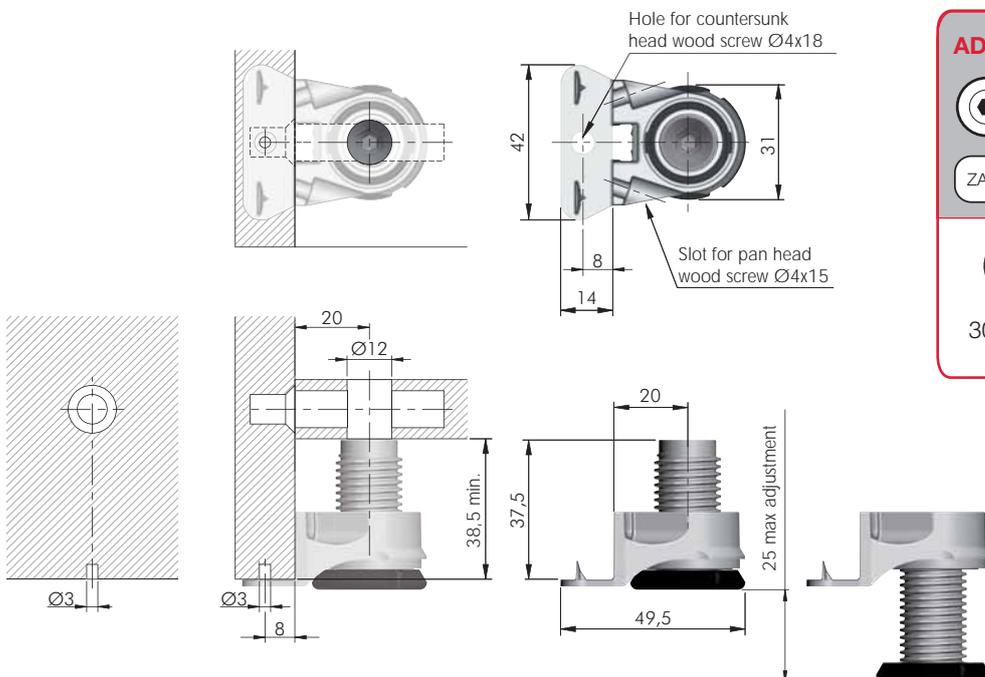

### ADJUSTMENT 0 - 25 mm




3010604000






**INTEGRATO FIXING ACCESSORIES**

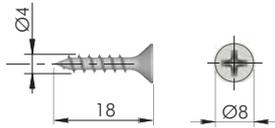


= Ø 3 mm +   
 = PZ2  
 = 6000 pcs.

60101580ZN

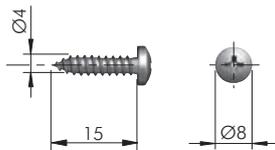

= Ø 3 mm +   
 = PZ2  
 = 1000 pcs.

60103230ZN

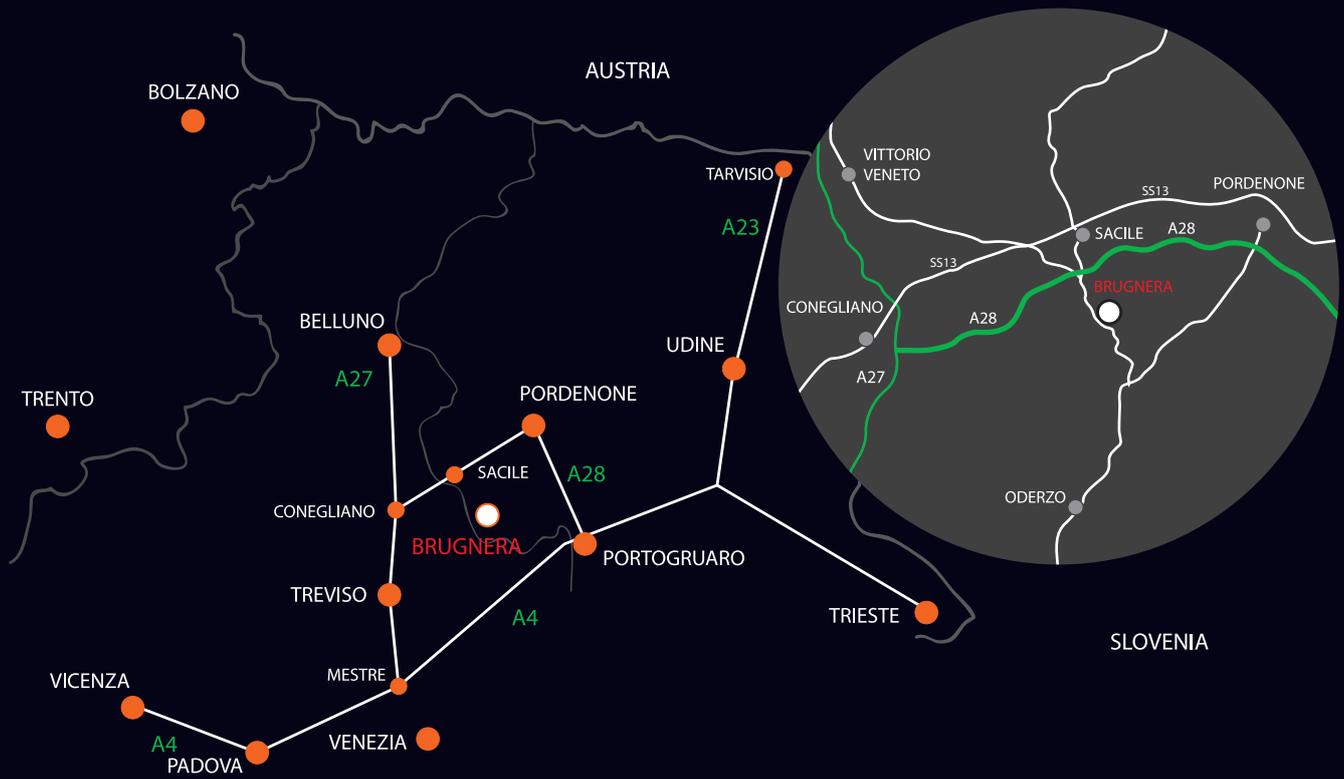

[www.italianaferramenta.com](http://www.italianaferramenta.com)